


## FLP50GR-385/1

Integral housing coordinated lightning current and surge arrester for protecting power supply system against surges.

- Coordinated spark-gap-based lightning current and surge arrester
- Maximum systems availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipment

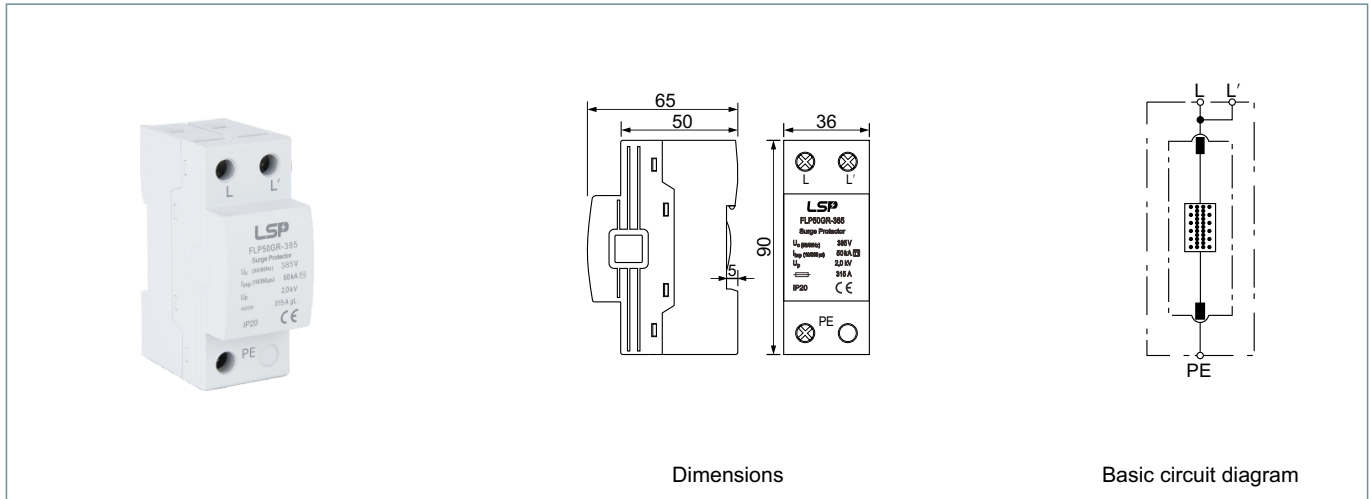

Type		FLP50GR-385/1
SPD according to EN 61643-11 / IEC 61643-11		type 1 / class I
Nominal a.c. voltage	$U_n$	230 / 400 V AC (50/60 Hz)
Max. continuous operating a.c. voltage	$U_c$	385 V AC (50/60 Hz)
Lightning impulse current (10/350 $\mu$ s) [L-PE]	$I_{imp}$	50 kA
Specific energy [L-PE] (W/R)		625,00 kJ/ohms
Voltage protection level [L-PE]	$U_p$	2,0 kV
Follow current extinguishing capability a.c.	$I_f$	50 kA <sub>rms</sub>
Follow current limitation / Selectivity		no tripping of a 20 A gL/gG fuse up to 50 kA <sub>rms</sub> (prosp.)
Response time	$t_A$	< 100 ns
Max. backup fuse (L) up to $I_k = 50$ kA <sub>rms</sub> ( $t_a < 0,2$ s)		500 A gL/gG
Max. backup fuse (L) up to $I_k = 50$ kA <sub>rms</sub> ( $t_a < 5$ s)		315 A gL/gG
Max. backup fuse (L) up to $I_k > 50$ kA <sub>rms</sub>		200 A gL/gG
Max. backup fuse (L-L')		125 A gL/gG
Temporary overvoltage (TOV) ( $U_T$ ) - Characteristic		530 V / 120 min. - withstand
Range of operating temperatures [parallel] / [series]	$T_U$	-40...+80°C / -40...+60°C
Operating state / fault indication		-
Number of ports		1
Cross-sectional area (L, L', PE) (min.)		10 mm <sup>2</sup> solid / flexible
Cross-sectional area (L, PE) (max.)		50 mm <sup>2</sup> stranded / 35 mm <sup>2</sup> flexible
Cross-sectional area (L') (max.)		35 mm <sup>2</sup> stranded / 25 mm <sup>2</sup> flexible
For mounting on		35 mm DIN rail acc. to EN 60715
Enclosure material		thermoplastic
Place of installation		indoor installation
Degree of protection		Ip20
Capacity		2 module(s), DIN 43880
Approvals		CE