


**FLP25GR-275/2**

Integral housing combined lightning current and surge arrester for protecting single-phase TN systems against surges.

- Prewired spark-gap-based type 1 and type 2 combined lightning current and surge arrester
- Maximum systems availability due to RADAX Flow follow current limitation
- Capable of protecting terminal equipment

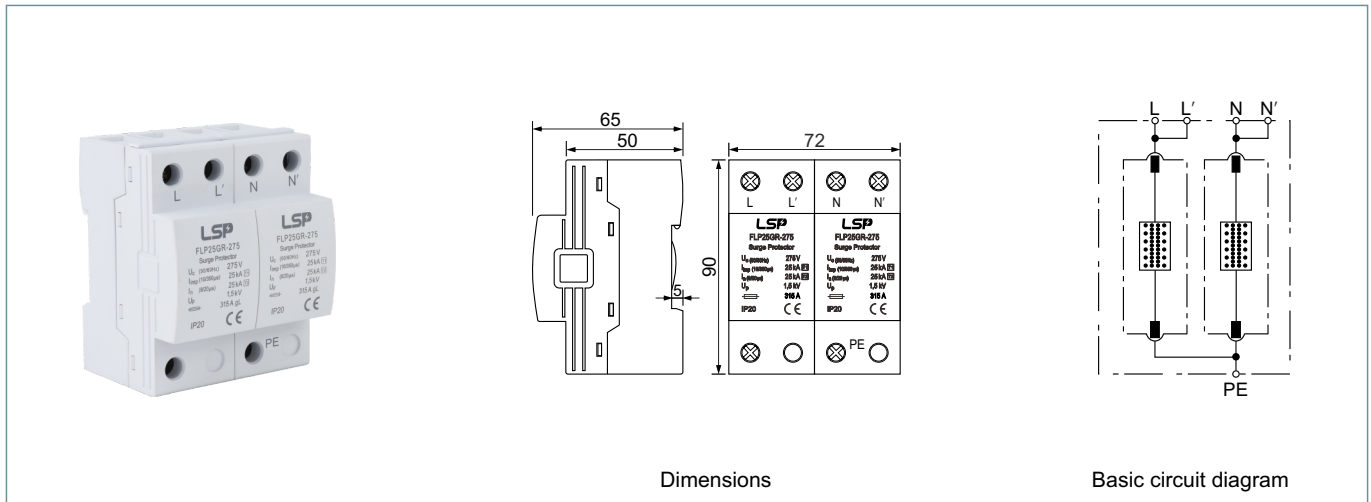

Type		FLP25GR-275/2
SPD according to EN 61643-11 / IEC 61643-11		type 1 + type 2 / class I + class II
Energy coordination with terminal equipment (< 5m)		type 1 + type 2 + type 3
Nominal a.c. voltage	$U_n$	230 / 400 V AC (50/60 Hz)
Max. continuous operating a.c. voltage	$U_c$	275 V AC (50/60 Hz)
Lightning impulse current (10/350µs) [L+N-PE]	$I_{total}$	50 kA
Specific energy [L+N-PE] (W/R)		625,00 kJ/ohms
Lightning impulse current (10/350µs) [L, N-PE]	$I_{imp}$	25 kA
Specific energy [L, N-PE] (W/R)		156,25 kJ/ohms
Nominal discharge current (8/20µs) [L/N-PE]/[L+N-PE]	$I_n$	25 kA / 50 kA
Voltage protection level [L-PE]/[N-PE]	$U_p$	1,5 kV / 1,5 kV
Follow current extinguishing capability a.c.	$I_{fi}$	50 kA <sub>rms</sub>
Follow current limitation / Selectivity		no tripping of a 20 A gL/gG fuse up to 50 kA <sub>rms</sub> (prosp.)
Response time	$t_A$	< 100 ns
Max. backup fuse (L) up to $I_K = 50$ kA <sub>rms</sub>		315 A gL/gG
Max. backup fuse (L-L')		125 A gL/gG
Temporary overvoltage (TOV) [L-N] ( $U_T$ ) - Characteristic		530 V / 120 min. - withstand
Range of operating temperatures [parallel] / [series]	$T_u$	-40...+80°C / -40...+60°C
Operating state / fault indication		-
Number of ports		1
Cross-sectional area (L, L', N, N', PE, PE') (min.)		10 mm <sup>2</sup> solid / flexible
Cross-sectional area (L, N, PE) (max.)		50 mm <sup>2</sup> stranded / 35 mm <sup>2</sup> flexible
Cross-sectional area (L', N', PE') (max.)		35 mm <sup>2</sup> stranded / 25 mm <sup>2</sup> flexible
For mounting on		35 mm DIN rail acc. to EN 60715
Enclosure material		thermoplastic
Place of installation		indoor installation
Degree of protection		IP20
Capacity		4 module(s), DIN 43880
Approvals		CE