


**SLP40-440/1+1**  
**SLP40-440/1S+1**

Modular surge arrester for use in single-phase TT and TN systems ("1+1" circuit); with floating remote signalling contact.

- Prewired complete unit consisting of a base part and plug-in protection modules
- High discharge capacity due to heavy duty zinc oxide varistors / spark gaps
- High reliability due to "Thermo Dynamic Control" SPD monitoring device

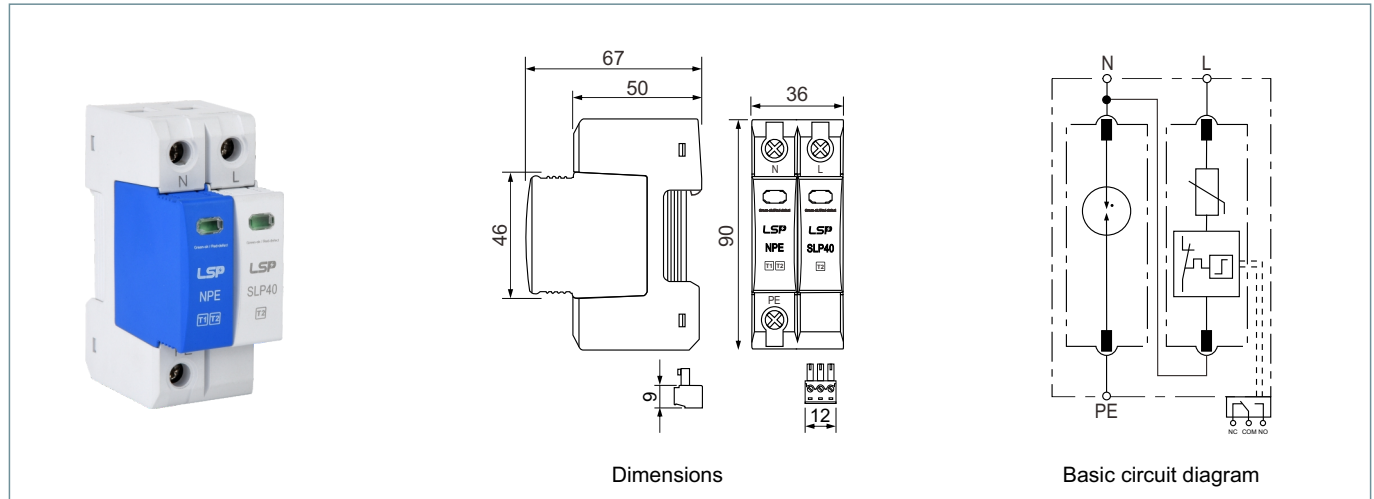

Type	SLP40-440/1+1	SLP40-440/1S+1
SPD according to EN 61643-11 / IEC 61643-11	type 2 / class II	type 2 / class II
Nominal a.c. voltage $U_n$	400 V AC (50/60 Hz)	400 V AC (50/60 Hz)
Max. continuous operating a.c. voltage [L-N] $U_c$	440 V AC (50/60 Hz)	440 V AC (50/60 Hz)
Max. continuous operating a.c. voltage [N-PE] $U_c$	255 V AC (50/60 Hz)	255 V AC (50/60 Hz)
Nominal discharge current (8/20 $\mu$ s) $I_n$	20 kA	20 kA
Maximum discharge current (8/20 $\mu$ s) $I_{max}$	40 kA	40 kA
Lightning impulse current (10/350 $\mu$ s) [N-PE] $I_{imp}$	12 kA	12 kA
Voltage protection level [L-N] $U_p$	2,0 kV	2,0 kV
Voltage protection level [N-PE] $U_p$	1,5 kV	1,5 kV
Follow current extinguishing capability [N-PE] $I_{fi}$	100 A <sub>rms</sub>	100 A <sub>rms</sub>
Response time [L-N] $t_a$	25 ns	25 ns
Response time [N-PE] $t_a$	100 ns	100 ns
Max. mains-side over-current protection	125 A gL/gG	125 A gL/gG
Short-circuit current rating $I_{SCCR}$	25 kA <sub>rms</sub>	25 kA <sub>rms</sub>
Temporary overvoltage (TOV) [L-N] ( $U_T$ ) - Characteristic	580V / 5 sec. - withstand	580 V / 5 sec. - withstand
Temporary overvoltage (TOV) [L-N] ( $U_T$ ) - Characteristic	765 V / 120 min. - safe failure	765 V / 120 min. - safe failure
Temporary overvoltage (TOV) [N-PE] ( $U_T$ ) - Characteristic	1200 V / 200 ms - withstand	1200 V / 200 ms - withstand
Range of operating temperatures $T_u$	-40/+80°C	-40/+80°C
Operating state / fault indication	green / red	green / red
Number of ports	1	1
Cross-sectional area (min.)	1.5 mm <sup>2</sup> solid /flexible	1.5 mm <sup>2</sup> solid /flexible
Cross-sectional area (max.)	35 mm <sup>2</sup> stranded / 25 mm <sup>2</sup> flexible	35 mm <sup>2</sup> stranded / 25 mm <sup>2</sup> flexible
For mounting on	35 mm DIN rail acc. to EN 60715	35 mm DIN rail acc. to EN 60715
Enclosure material	thermoplastic	thermoplastic
Place of installation	indoor installation	indoor installation
Degree of protection	IP 20	IP 20
Capacity	2 module(s), DIN 43880	2 module(s), DIN 43880
Approvals	CE	CE
Type of remote signalling contact	-	changeover contact
a.c. switching capacity	-	250V / 0.5 A
d.c. switching capacity	-	250V / 0.1 A; 125 V / 0.2 A; 75 V / 0.5 A
Cross-sectional area for remote signalling terminals	-	max. 1.5 mm <sup>2</sup> solid / flexible