


**LSA-B-MAG**

Type 2 for LSA technology for inseparably connecting 10 pairs each on the cable and routing side. Accommodates LSA-A-LEI arresters. Parallel protective circuit only.

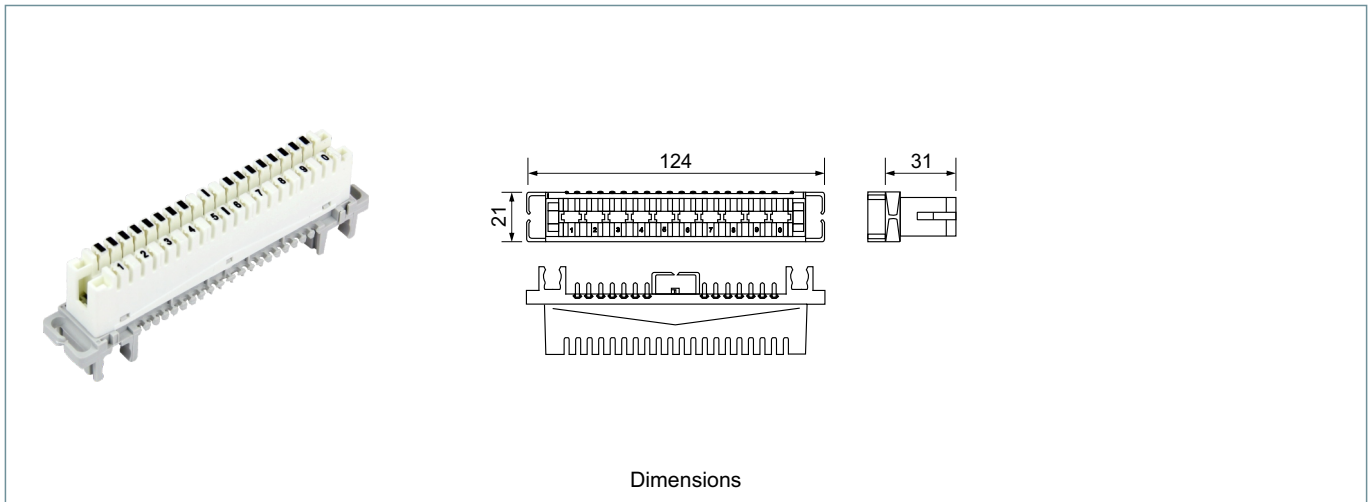

| Type   | LSA-B-MAG        |
|--|------------------|
| Enclosure material                                     | PBT              |
| Test standards   | DIN 47608-1, -2  |
| Diameter of solid conductors                           | 0.40-0.80 mm     |
| Conductor diameter with insulation                     | 0.70-1.50 mm     |
| Contacting frequency for conductor diameters < 0.65 mm | > 50 x           |
| Contacting frequency for conductor diameters of 0.8 mm | < 50 x           |
| Contact material                                       | special brass    |
| Contact surface  | silver           |
| Flame protection                                       | UL 94 V-0        |
| Insulation resistance                                  | 5x 10,000 M ohms |
| Volume resistance of IPC terminal                      | < 10 M ohms      |
| Electric strength                                      | 2 kV / 50 Hz     |